


# DorTag VI RFID – 1000 user



**CAC422023F**

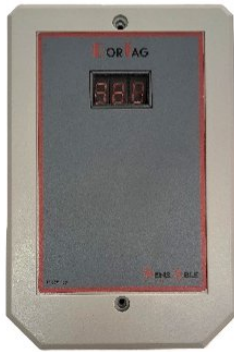

## FEATURES

- Standalone Single door access system
- 1 reader +1 controller
- Accepts Key tag or RF card
- 1000 user memory
- 1 or 2 reader mode selectable
- RTE input (Request to exit)
- Adjustable relay time
- Fire Alarm input
- For use with strike or magnetic locks
- Pulse or On/Off function
- Compact Size

SPECIFICATIONS	
Operating Voltage	12V DC / AC
Rated Current	33mA
Maximum Current	55mA @12V
Outputs	1 Potential-free contact
Contact Load	24 V DC @ 5A
Memory	30 users
Frequency	125kHz (50Hz- 4kHz modulation)
Interface	EM4102
Reader heads	1 reader included
Read range	60mm – 100mm
Cabling	2m standard , 5 core
Max reader cable length	5m Unshielded 15m Shielded
Indicators	Bi Colour LED Audible buzzer
Protection Class	Controller – IP00 Reader head –IP54
Dimensions	Controller 104 x 94 x 25mm Reader head 75 x 39 x 15mm

*(The Company reserves the right to amend product specifications and information without notice.)*